


MARKINGS:

A1-A2-A3      0%  
 B1-B2-B3      65%  
 C1-C2-C3      80%  
 H1-H2-H3      100%

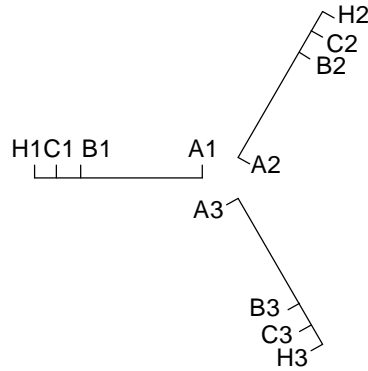

3 PHASE MOTOR STARTING  
AUTO-TRANSFORMER  
TYPE: ANN-SELF COOLED

CAT.NO.:                      RS10J  
 HP:                              10  
 VOLTAGE SYSTEM:          600 V  
 TAPS:                            0, 65%, 80%, 100%  
DUTY:  
 ON:                              15 Seconds  
 OFF:                             3 Minutes 45 Seconds  
 REPEAT:                      15 Cycles - For automatically operated starter  
    4 Cycles - For Manually operated starter  
 REST:                            2 Hours  
 ON:                              15 Seconds  
 OFF:                             3 Minutes 45 Seconds  
 REPEAT:                      15 Cycles - For automatically operated starter  
    4 Cycles - For Manually operated starter


A	B	C	D	E
DIMENSIONS			MOUNTING	
10.00	4.50	9.25	7.50	4.0

INSULATION CLASS:      220° C  
 FREQUENCY:              60 Hz.  
 COILS:                      COPPER  
 WEIGHT:                    21 Lbs

TERMINATION:            COPPER PADS

STANDARDS:  
 -CSA CERTIFIED  
 -UL LISTED

SPECIAL FEATURE:  
 -NC 200°C THERMOSTAT ON CENTRE COIL

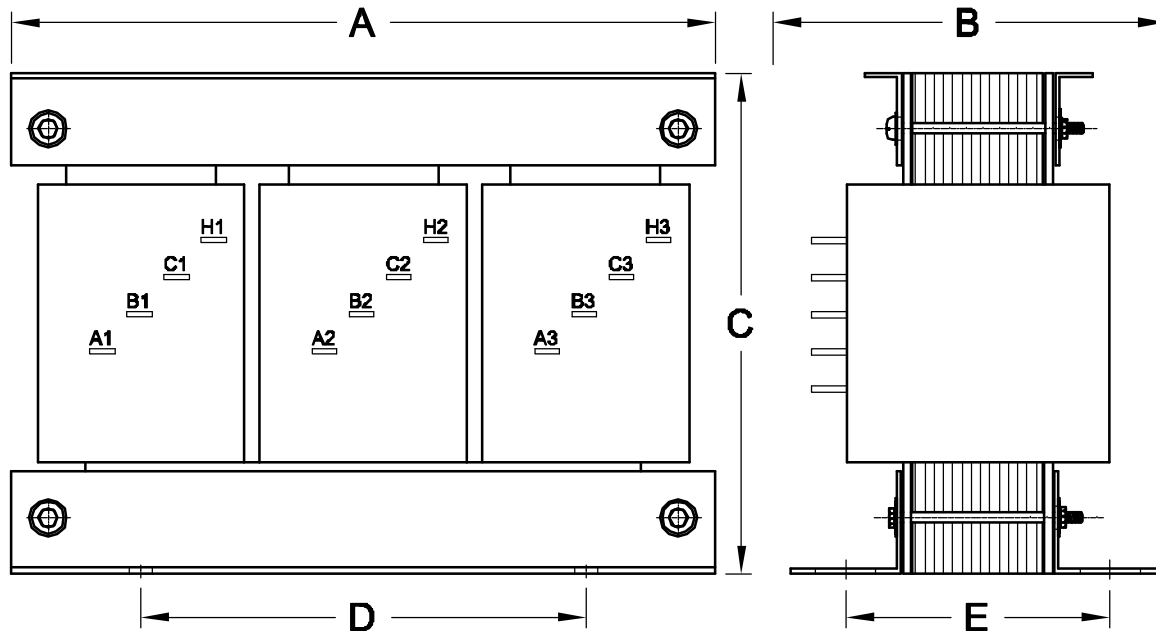

REV.	REMARKS	BY:	DATE:
<b>REX MANUFACTURING</b> DIVISION OF TRANSFACTOR INDUSTRIES INC.			
DRAWN BY: SARKIS	DATE: AUGUST 12, 2004	REV.: 0	
CHECKED BY: V.S.	DATE: AUGUST 12, 2004	SWO#: N/A	
TITLE: MOTOR STARTING AUTO-TRANSFORMER OUTLINE 3 PHASE, 10 HP, 600 V			
SCALE: N.T.S.	DRAWING No.:		