


**MARKINGS:**

A1-A2-A3      0%  
 B1-B2-B3      50%  
 C1-C2-C3      65%  
 D1-D2-D3      80%  
 H1-H2-H3      100%

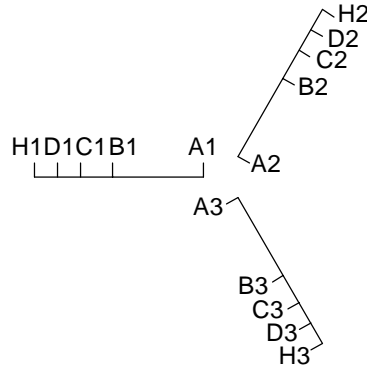

**3 PHASE MOTOR STARTING  
 AUTO-TRANSFORMER  
 TYPE: ANN-SELF COOLED**

CAT.NO.: RS200J  
 HP: 200  
 VOLTAGE SYSTEM: 600 V  
 TAPS: 0, 50%, 65%, 80%, 100%  
**DUTY:**  
 ON: 15 Seconds  
 OFF: 3 Minutes 45 Seconds  
 REPEAT: 15 Cycles - For automatically operated starter  
 4 Cycles - For Manually operated starter  
 REST: 2 Hours  
 ON: 15 Seconds  
 OFF: 3 Minutes 45 Seconds  
 REPEAT: 15 Cycles - For automatically operated starter  
 4 Cycles - For Manually operated starter


A	B	C	D	E
DIMENSIONS		MOUNTING		
16.00	9.00	12.75	13.00	6.75

INSULATION CLASS: 220° C  
 FREQUENCY: 60 Hz.  
 COILS: COPPER  
 WEIGHT: 200 Lbs

TERMINATION: COPPER PADS

**STANDARDS:**  
 -CSA CERTIFIED  
 -UL LISTED

**SPECIAL FEATURE:**  
 -NC 200°C THERMOSTAT ON CENTRE COIL

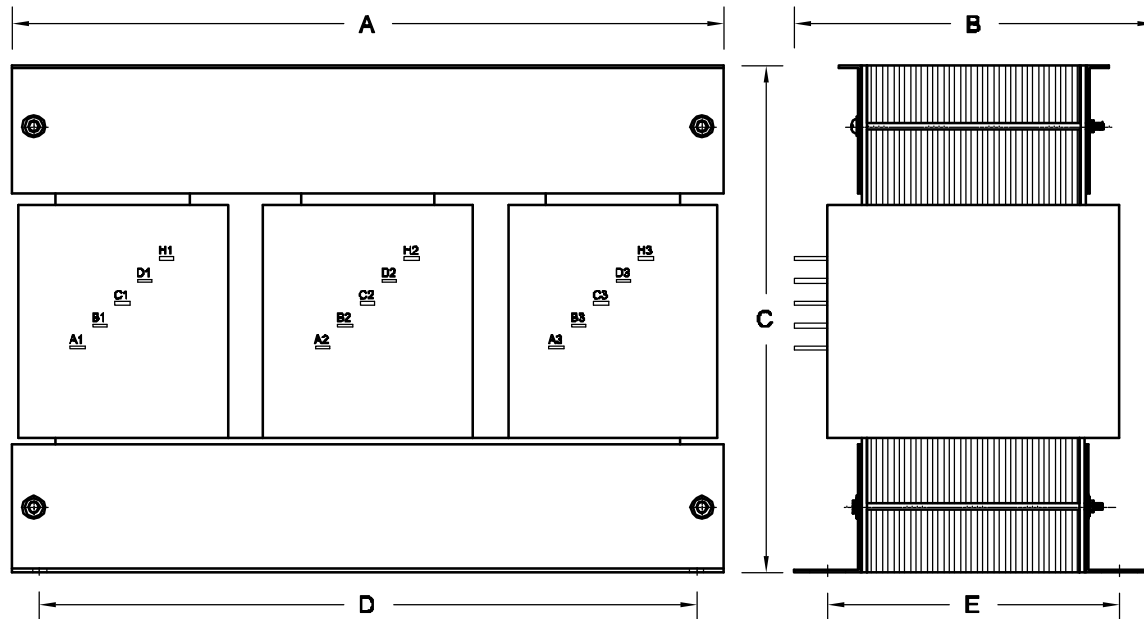

REV.	REMARKS	BY:	DATE:
<b>R3CM</b>		<b>REX MANUFACTURING</b> DIVISION OF TRANSFACTOR INDUSTRIES INC.	
DRAWN BY: SARKIS	DATE: AUGUST 12, 2004		
CHECKED BY: V.S.	DATE: AUGUST 12, 2004		
TITLE: MOTOR STARTING AUTO-TRANSFORMER OUTLINE 3 PHASE, 200 HP, 600 V			
SCALE: N.T.S.	DRAWING No.:		