



REX POWER MAGNETICS


DIVISION OF TRANSFACTOR INDUSTRIES INC.
65 Basaltic Rd. Concord, ON, L4K 1G4 Canada
Tel: 905-695-8844, 1-800-387-2840 Fax: 905-695-8855
www.RexPowerMagnetics.com

ENERGY EFFICIENT TRANSFORMER

- 3 Phase Isolation
- Dry Type
- ANN Self Cooled

PRELIMINARY DRAWING ONLY
This drawing may **NOT** truly reflect our Final Design. Any resulting order(s) must be accompanied by, or refer to this drawing and be marked with any proposed changes.

Purchaser: TBA
 PO#: TBA
 SWO#: TBA
 Qty: TBA

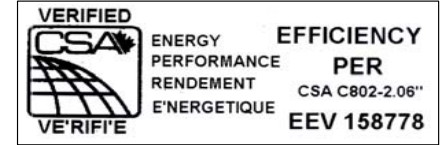

Coils: Aluminum
 Cat. No.: BA225J-M/Z

kVA: 225
 Primary: 600 Delta Volts
 Secondary: 208 Y/120 Volts
 Primary Taps: 2.5 %
 -Taps FCAN 2
 -Taps FCBN 2

Frequency: 60 Hz
 Sound Level: 55 dB Max.
 BIL: 10 kV
 Insulation Class: 220° C
 Temperature Rise: 150° C
 Impedance: 5.0 - 6.0 %

Min. Efficiency: 98.5 %
 - Calculated @ 35% Loaded

Weight: 1450 Lbs

Termination	Location	Terminals
Primary:	Front	6-300 MCM 1/Ph
Secondary:	Front	2-600 MCM 2/Ph

Wiring Connection:

Primary:	H1-H2-H3
Voltage	% Tap
630	105.0
615	102.5
600	100.0
585	97.5
570	95.0

Secondary:	X0-X1-X2-X3
Voltage	Phase
208	3
120	1



Connect Loads To:
 X1-X2-X3
 X0-X1, X0-X2,
 and/or X0-X3

Standards:

1. CSA Certified
 - File No. LR34493
2. UL Listed
 - File No. E108255

Standard Features:

1. Anti-vibration pads installed between the enclosure base and the core & coil assembly
2. Ground lug provided
3. Transformer meets Efficiency per CSA C802.2
4. Transformer meets NEMA TP-1 Efficiency Level

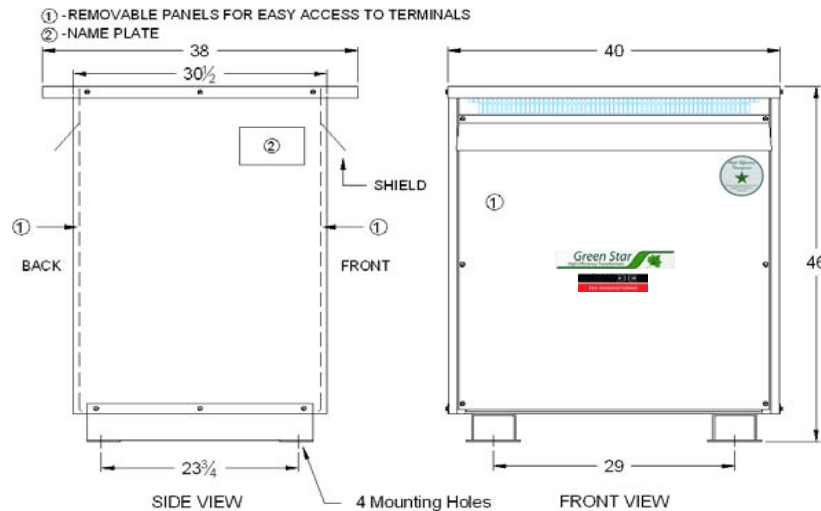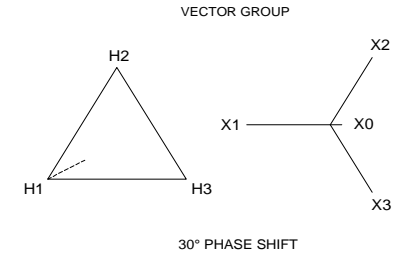

CSA Enclosure:

1. Type 3R (NEMA 3R)
 - Sprinklerproof when the angle between sprinkler heads and opening in the enclosure does Not exceed 45 degree from the vertical.
2. Ventilated
3. ASA 61 grey
4. Floor mounting

2	Updated Logo & Wgt.	AP	VS	May 13, 2011
1	Updated Standard Features	SA	VS	Oct. 26, 2010
REV#	Remarks	BY	Approved By	DATE

Prepared by: SA
 Approved by: VS
 Date: OCT 26 2010