

- NOTE:
1. TRANSFORMER IS FREESTANDING IN ENCLOSURE
 2. METAL GAUGE TO CSA-C22 No. 94-M91
 3. PAINT ASA # 61 GRAY
 4. BOLTED, KNOCK DOWN CONSTRUCTION
 5. OPEN BOTTOM
 6. COVERED OPENING FOR ACCESS TO LIFTING POINTS

CSA TYPE 1 (NEMA 1)
INDOOR USE

APPROX. WEIGHT:
CORE & COIL: 11200 LBS
ENCLOSURE: 1600 LBS
TOTAL: 12800 LBS

TRANSFORMER:

KVA: 1250

PRIMARY VOLTAGE CLASS: 34.5 KV

PRIMARY VOLTAGE: 34500 VOLTS DELTA*
OR
 27600 VOLTS DELTA*


OTHER _____

PRIMARY TAPS:

2x2.5% FCAN, 2x2.5% FCBN

SECONDARY VOLTAGE:

600Y/347 VOLTS
OR
 480Y/277 VOLTS
OR
 OTHER _____

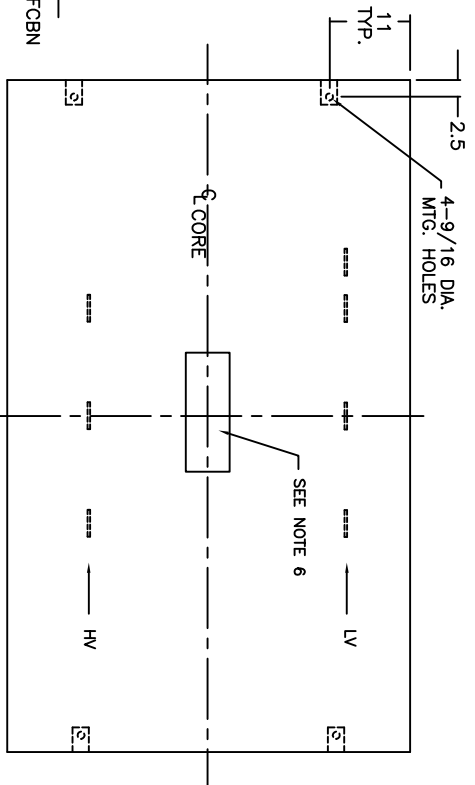

PLAN VIEW

① NAME PLATE

PRIMARY B.I.L.: 150 KV
SECONDARY B.I.L.: 10 KV
INSULATION CLASS: 220°C
TEMPERATURE RISE: 150°C
IMPEDANCE: STANDARD
SOUND LEVEL: STANDARD

WINDING MATERIAL:

COPPER
OR
 ALUMINUM



TERMINAL MATERIAL:

COPPER
OR
 ALUMINUM


STANDARD FEATURES:

ANTI-VIBRATION PADS

VECTOR DIAGRAM

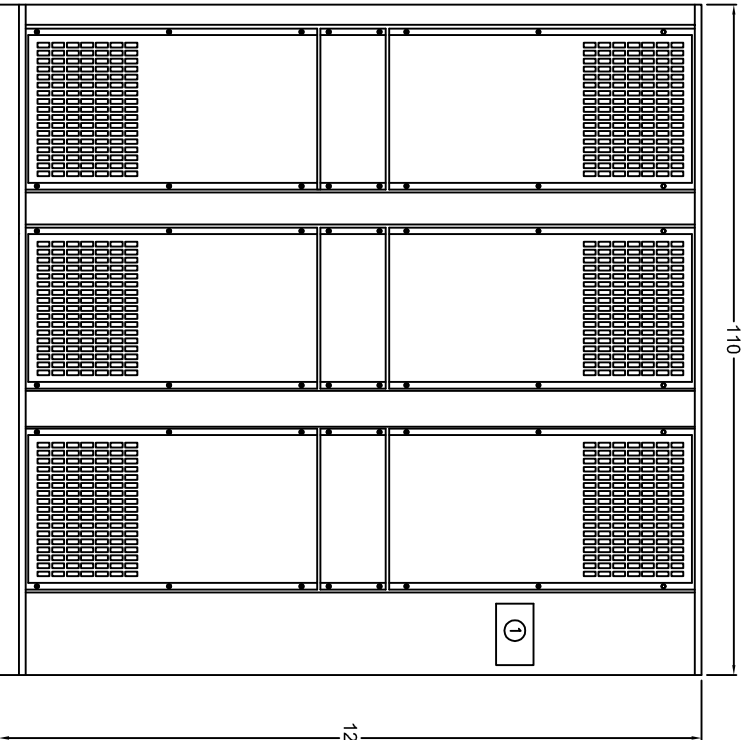

FRONT VIEW

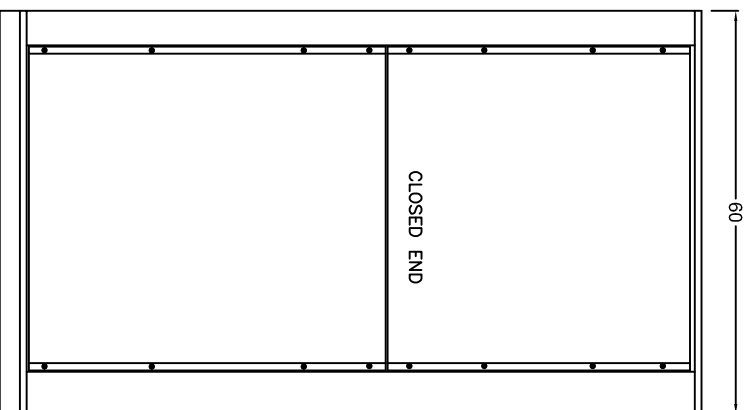

END VIEW

Note: Dimensions may change if units are co-ordinated with switchgear.
 Dimensions are estimates. For firm dimensions contact factory.
 *For Y-Y connection consult factory for dimensions

REV.	REMARKS	BY	DATE

REX POWER MAGNETICS
 DIVISION OF TRANSFACTOR INDUSTRIES INC.
 SCALE: N.T.S. DRAWN BY: SARKIS DATE: JUNE 8, 10
 CHECKED BY: DAMI DATE: JUNE 8, 10
 TITLE: 1250KVA 34.5KV CLASS ENCLOSURE OUTLINE
 NEMA-1
 DRAWING No. 1250KVA-BIL150-1