

- NOTE:
1. TRANSFORMER SITS ON ENCLOSURE BASE
 2. METAL GAUGE TO CSA-C22 No. 94-M91
 3. PAINT ASA # 61 GRAY
 4. BOLTED, KNOCK DOWN CONSTRUCTION
 5. OPEN BOTTOM
 6. COVERED OPENING FOR ACCESS TO LIFTING POINTS





CSA TYPE 1 (NEMA 1)
INDOOR USE

APPROX. WEIGHT:
CORE & COIL: 7800 LBS
ENCLOSURE: 1250 LBS
TOTAL: 9050 LBS

TRANSFORMER:
KVA: 1750
PRIMARY VOLTAGE CLASS: 1.2 KV
PRIMARY VOLTAGE: 600 VOLTS DELTA
OR
 480 VOLTS DELTA
OR
 OTHER _____
PRIMARY TAPS: 2x2.5% FCAN, 2x2.5% FCBN
SECONDARY VOLTAGE: 240Y/138 VOLTS
OR
 208Y/120 VOLTS
OR
 OTHER _____

PRIMARY B.I.L.: 10 KV
SECONDARY B.I.L.: 10 KV
INSULATION CLASS: 220°C
TEMPERATURE RISE: 150°C
IMPEDANCE: STANDARD
SOUND LEVEL: STANDARD

WINDING MATERIAL: COPPER OR ALUMINUM
TERMINAL MATERIAL: COPPER OR ALUMINUM
STANDARD FEATURES: ANTI-VIBRATION PADS

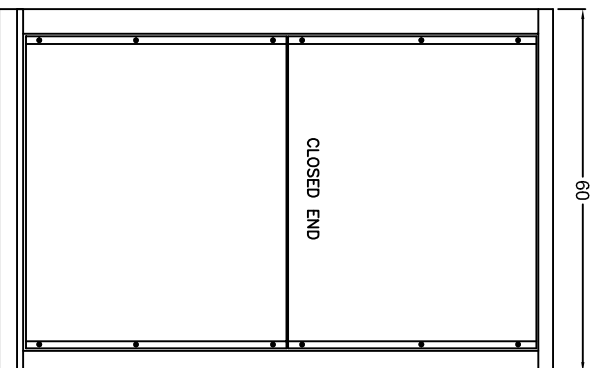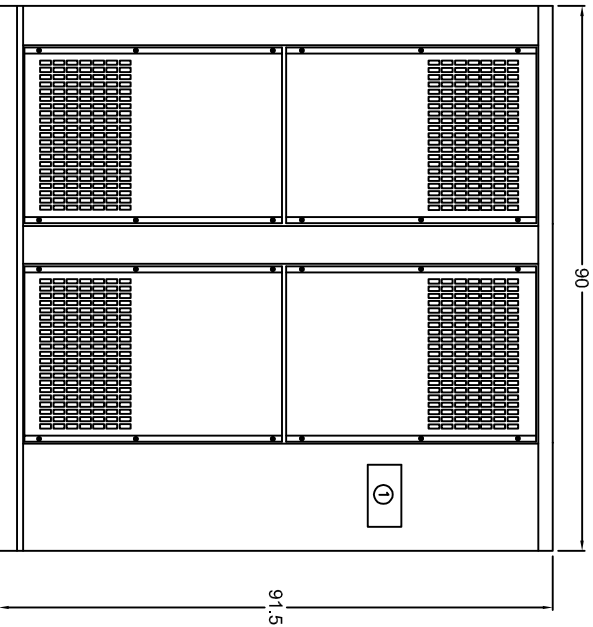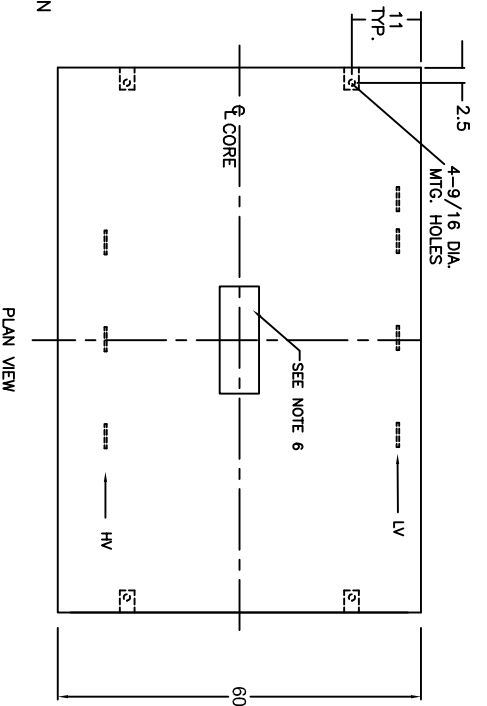

① NAME PLATE

Note: Dimensions may change if units are co-ordinated with switchgear. Dimensions are estimates. For firm dimensions contact factory.

REV.	REMARKS	BY	DATE

REX POWER MAGNETICS
DIVISION OF TRANSFORMER INDUSTRIES INC.
SCALE: N.T.S. DRAWN BY: SARKIS DATE: MAY 12, 09
JOB: 1750KVA 1.2KV CLASS ENCLOSURE OUTLINE
DESIGNED BY: DMM DATE: MAY 12, 09
NEMA-1
DRAWING No. 1750KVA-BIL10-1