


- NOTE:
1. TRANSFORMER SITS ON ENCLOSURE BASE
 2. METAL GAUGE TO CSA-C22 No. 94-M91
 3. PAINT ASA # 61 GRAY
 4. BOLTED, KNOCK DOWN CONSTRUCTION
 5. OPEN BOTTOM
 6. COVERED OPENING FOR ACCESS TO LIFTING POINTS


CSA TYPE 3R (NEMA 3R)
INDOOR/OUTDOOR USE

APPROX. WEIGHT:
CORE & COIL: 8400 LBS
ENCLOSURE: 1250 LBS
TOTAL: 9650 LBS

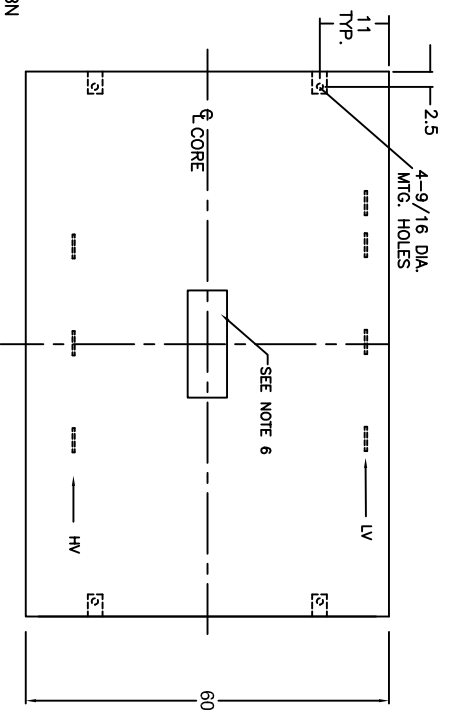

PLAN VIEW
(COVER REMOVED)

VENTILATION LOUVRES

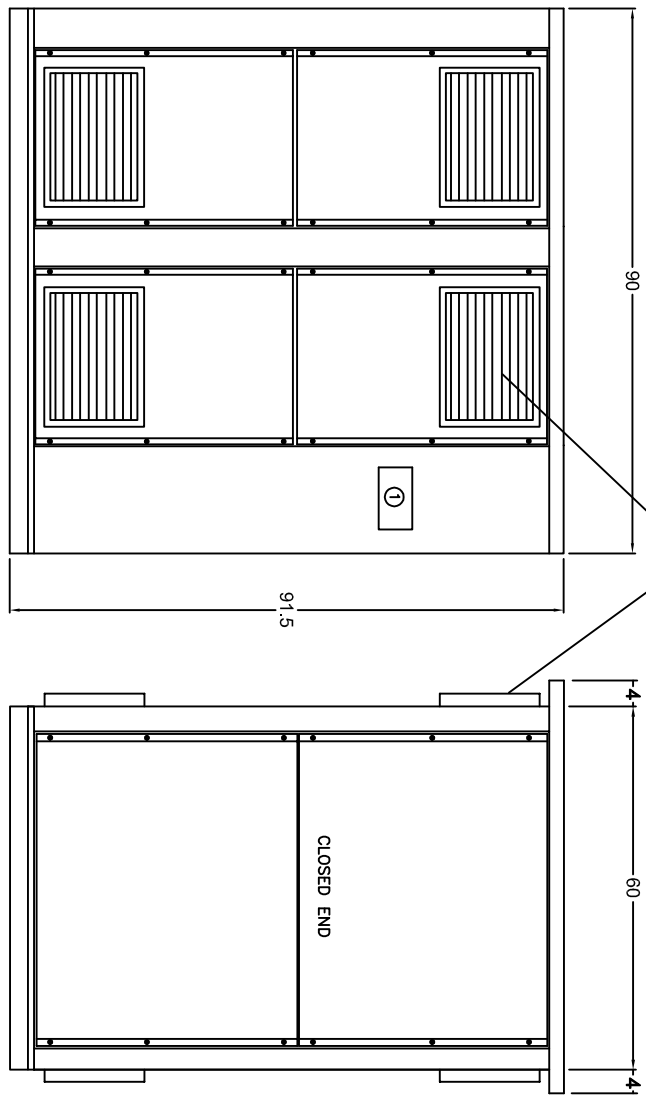

FRONT VIEW

SIDE VIEW

① NAME PLATE

TRANSFORMER:

KVA: 2250

PRIMARY VOLTAGE CLASS: 1.2 KV

PRIMARY VOLTAGE: 600 VOLTS DELTA
OR
 480 VOLTS DELTA
OR
 OTHER _____

PRIMARY TAPS: 2x2.5% FCAN, 2x2.5% FCBN

SECONDARY VOLTAGE: 240V/138 VOLTS
OR
 208V/120 VOLTS
OR
 OTHER _____


PRIMARY B.I.L.: 10 KV
SECONDARY B.I.L.: 10 KV
INSULATION CLASS: 220°C
TEMPERATURE RISE: 150°C
IMPEDANCE: STANDARD
SOUND LEVEL: STANDARD

WINDING MATERIAL: COPPER
OR
 ALUMINUM

TERMINAL MATERIAL: COPPER
OR
 ALUMINUM

STANDARD FEATURES: ANTI-VIBRATION PADS

VECTOR DIAGRAM



Note: Dimensions may change if units are co-ordinated with switchgear.
Dimensions are estimates. For firm dimensions contact factory.

REX POWER MAGNETICS DIVISION OF TRANSFORMER INDUSTRIES INC. 1000 N.T.S. 1000 SARKIS BLVD DANA POINT, CA 92629 PHONE: (714) 241-1209 FAX: (714) 241-1208 DATE: MAY 12, 2009		TITLE: 2250KVA 1.2KV CLASS ENCLOSURE OUTLINE NEMA-3R	DRAWING No. 2250KVA-BIL10-3R
JOB: 2250KVA 1.2KV CLASS ENCLOSURE OUTLINE DESIGNED BY: SARKIS DRAWN BY: DANA DATE: MAY 12, 2009 SCALE: N.T.S.	CHECKED BY: SARKIS DATE: MAY 12, 2009 REV: 0	BY: _____ DATE: _____	REMARKS: _____