

- NOTE:
1. TRANSFORMER SITS ON ENCLOSURE BASE
  2. METAL GAUGE TO CSA-C22 No. 94-M91
  3. PAINT ASA # 61 GRAY
  4. BOLTED, KNOCK DOWN CONSTRUCTION

**TRANSFORMER:**

KVA: 750

PRIMARY VOLTAGE CLASS: 1.2 KV

PRIMARY VOLTAGE:

- 600 VOLTS DELTA OR 480 VOLTS DELTA
- OTHER \_\_\_\_\_

PRIMARY TAPS:

- 2x2.5% FCAN, 2x2.5% FCBN
- 240Y/138 VOLTS OR 208Y/120 VOLTS
- OTHER \_\_\_\_\_

SECONDARY VOLTAGE:

- 10 KV
- 10 KV 220°C 150°C STANDARD
- COPPER OR ALUMINUM
- COPPER OR ALUMINUM
- ALUMINUM
- ANTI-VIBRATION PADS

**PRIMARY B.I.L.:**

SECONDARY BIL:  
INSULATION CLASS:  
TEMPERATURE RISE:  
IMPEDANCE:  
SOUND LEVEL:

WINDING MATERIAL:



- COPPER OR ALUMINUM
- ALUMINUM

TERMINAL MATERIAL:

- COPPER OR ALUMINUM
- ALUMINUM



STANDARD FEATURES:

**VECTOR DIAGRAM**

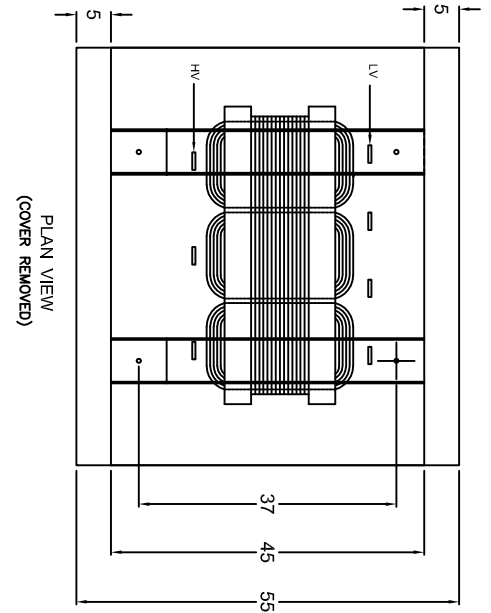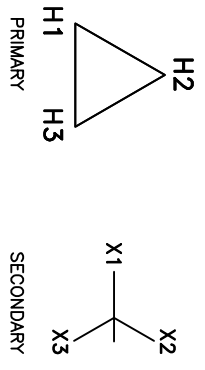

ENCLOSURE: CSA TYPE 3R (NEMA 3R)  
INDOOR/OUTDOOR USE

APPROX. WEIGHT:  
CORE & COIL: 3300 LBS  
ENCLOSURE: 700 LBS  
TOTAL: 4000 LBS

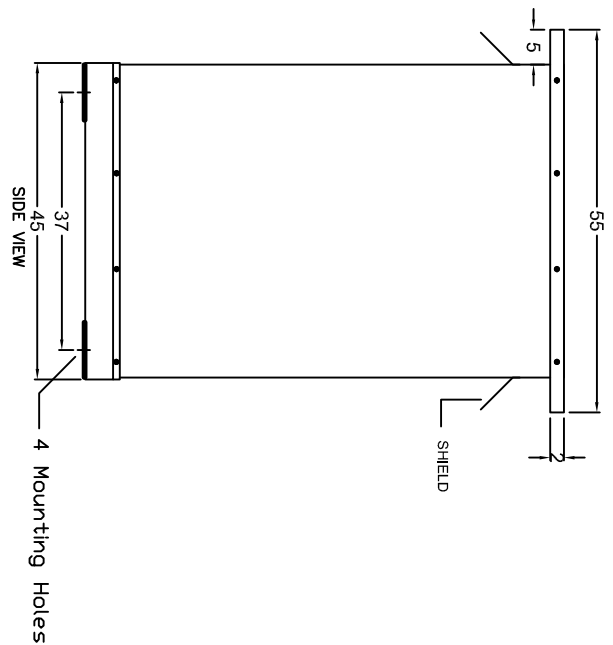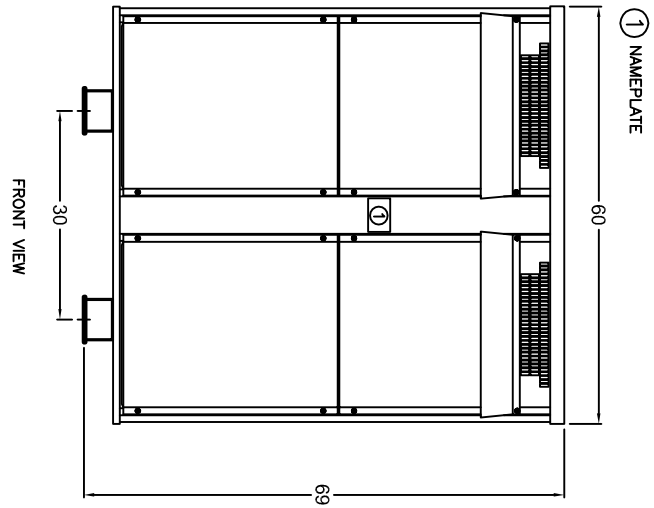

**Note:** Dimensions may change if units are co-ordinated with switchgear. Dimensions are estimates. For firm dimensions contact factory.

REV.		REMARKS		BY	DATE
<b>REX POWER MAGNETICS</b> DIVISION OF TRANSFACTOR INDUSTRIES INC. ORDER: N.T.S.    DRAWN BY: SARKIS    CHECKED BY: DMM    DATE: MAY 11, 09 TITLE: 750KVA 1.2KV CLASS ENCLOSURE OUTLINE    NEMA 3R DRAWING No. 750KVA-BIL10-3R					