
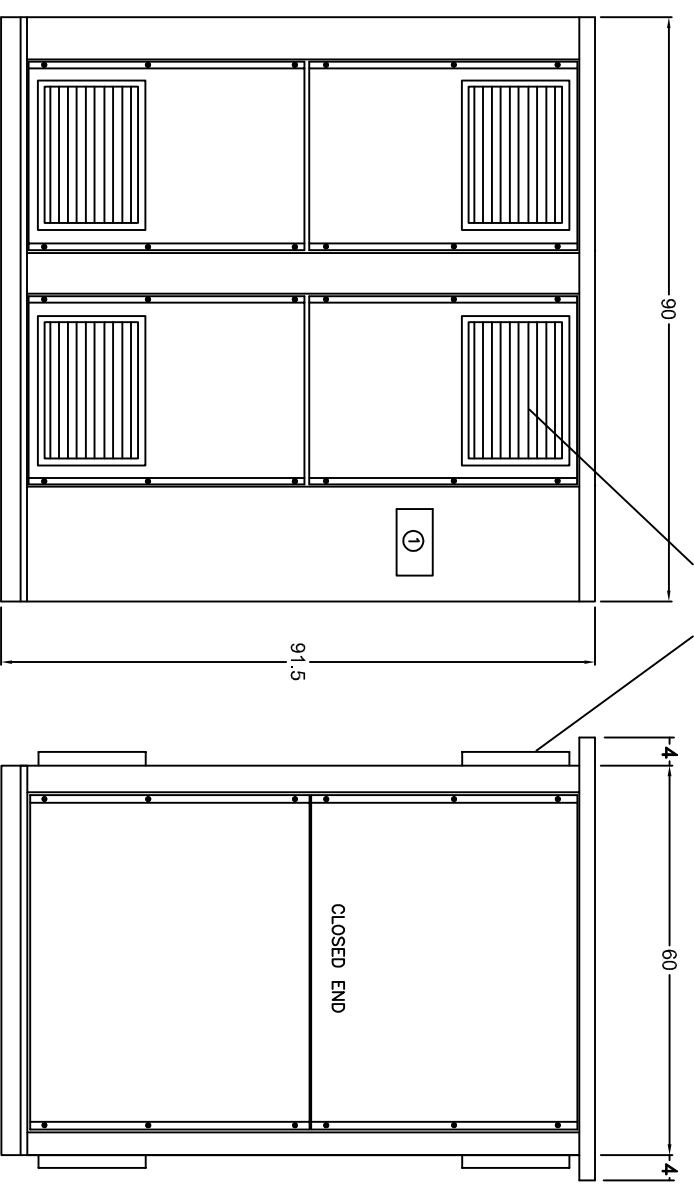



- NOTE:**
1. TRANSFORMER SITS ON ENCLOSURE BASE
 2. METAL GAUGE TO CSA-C22 No. 94-M91
 3. PAINT ASA # 61 GRAY
 4. BOLTED, KNOCK DOWN CONSTRUCTION
 5. OPEN BOTTOM
 6. COVERED OPENING FOR ACCESS TO LIFTING POINTS

CSA TYPE 3R (NEMA 3R)
INDOOR / OUTDOOR

APPROX. WEIGHT:
CORE & COIL: 6200 LBS
ENCLOSURE: 1250 LBS
TOTAL: 7450 LBS

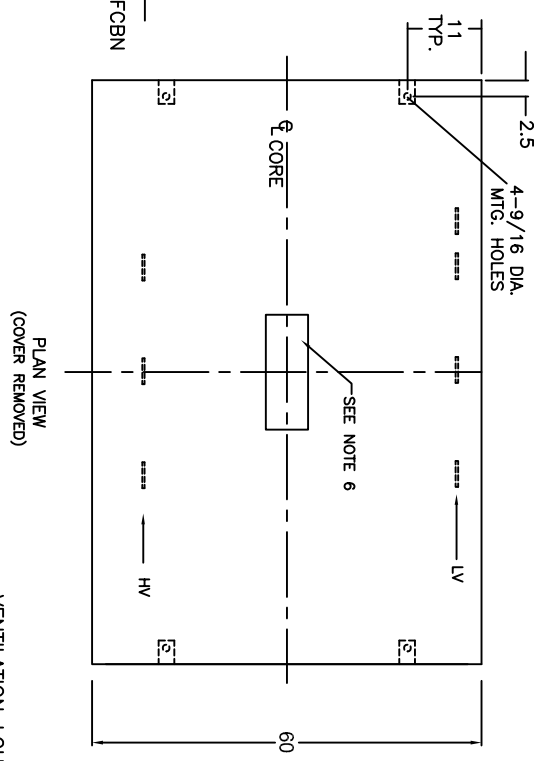

VECTOR DIAGRAM

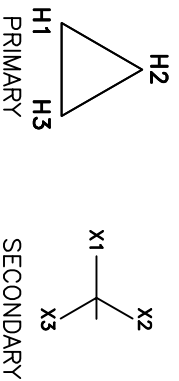

① NAME PLATE

TRANSFORMER:

KVA: 750

PRIMARY VOLTAGE CLASS: 18 KV

- PRIMARY VOLTAGE: 13800 VOLTS DELTA
OR
 12470 VOLTS DELTA
OR
 OTHER _____

PRIMARY TAPS:

- 2x2.5% FCAN, 2x2.5% FCBN
 600Y/347 VOLTS
OR
 480Y/277 VOLTS
OR
 OTHER _____

SECONDARY VOLTAGE:

- 95 KV
10 KV
220°C
150°C
STANDARD
STANDARD

PRIMARY B.I.L.:

- SECONDARY BIL: _____
INSULATION CLASS: _____
TEMPERATURE RISE: _____
IMPEDANCE: _____
SOUND LEVEL: _____

WINDING MATERIAL:

- COPPER
OR
 ALUMINUM

TERMINAL MATERIAL:

- COPPER
OR
 ALUMINUM

STANDARD FEATURES:

ANTI-VIBRATION PADS

Note: Dimensions may change if units are co-ordinated with switchgear.
Dimensions are estimates. For firm dimensions contact factory.

REV.	REMARKS	BY	DATE

REX POWER MAGNETICS
DIVISION OF TRANSFACTOR INDUSTRIES INC.
N.T.S. DRAWN BY: SARAKIS DATE: MAY 12, 09
CHECKED BY: DMM DATE: MAY 12, 09
TITLE: 750KVA 18KV CLASS ENCLOSURE OUTLINE
NEMA-3R
DRAWING No. 750KVA-BL95-3R