REX POWER MAGNETICS
DIVISION OF TRANSFACTOR INDUSTRIES INC.
65 Basaltic Rd. Concord, ON, L4K 1G4 Canada
Tel: 905-695-8844, 1-800-387-2840 Fax: 905-695-8855
www.RexPowerMagnetics.com

CONTROL TRANSFORMER

- DRY TYPE
- ANN Self Cooled

PRELIMINARY DRAWING ONLY
This drawing may NOT truly reflect our Final Design. Any resulting order(s) must be accompanied by, or refer to this drawing and be marked with any proposed changes.

Purchaser: TBA
PO#: TBA
SWO#: TBA
Qty: TBA

REX's Cat. No.:	CS100J-K
Customer's P/N:	N/A
VA Rating:	100
Primary:	600 Volts
Secondary:	120/240 Volts
Frequency:	60 Hz
Insulation Class:	130° C
Temperature Rise:	80° C
Weight:	5.0 Lbs

Termination	Location	Terminals
Primary:	Front	Terminal Blocks
Secondary:	Back	Terminal Blocks

Wiring Connection:

Primary:

Voltage	Connect Lines To:
600	H1-H2

Secondary:

Voltage	Interconnect:	Connect Loads To:
240	X2 To X3	X1-X4
120	X1 To X3 X2 To X4	X1-X4
120/240	X2 To X3	X1-X2-X4 (X2 is a Neutral)

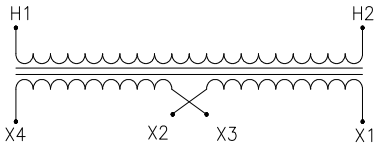

Standards:

1. CSA Certified
   - File No. LR34493
2. UL Listed
   - File No. E110286

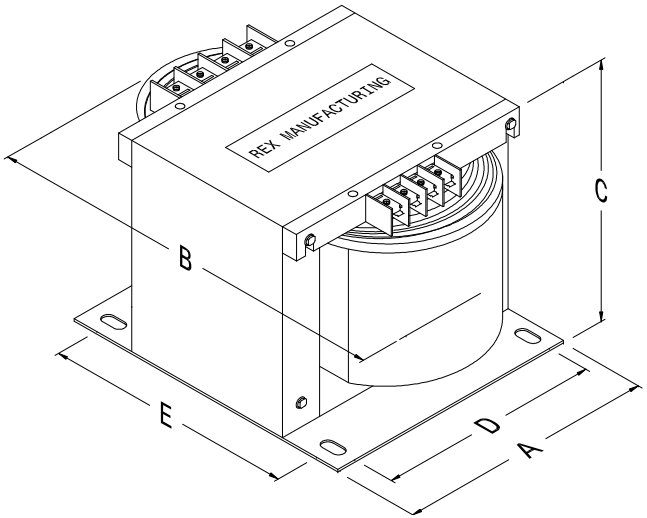

Dimensions (Inches):

A	=	3.00
B	=	5.00
C	=	2.50
D	=	2.50
E	=	3.00

(Mounting Slots: 0.25 X 0.50)

Design:

- Open Construction
- Indoor Application
- Floor/Wall Mounting

Prepared by: AP
Approved by: VS
Date: MAR.10, 2008