



REX POWER MAGNETICS

DIVISION OF TRANSFACTOR INDUSTRIES INC.
65 Basaltic Rd. Concord, ON, L4K 1G4 Canada
Tel: 905-695-8844, 1-800-387-2840 Fax: 905-695-8855
www.RexPowerMagnetics.com

CONTROL TRANSFORMER

- DRY TYPE
- ANN Self Cooled

Purchaser: TBA
 PO#: TBA
 SWO#: TBA
 Qty: TBA

PRELIMINARY DRAWING ONLY
 This drawing may NOT truly reflect our Final Design. Any resulting order(s) must be accompanied by, or refer to this drawing and be marked with any proposed changes.

REX's Cat. No.: CS2000J-K
 Customer's P/N: N/A
 VA Rating: 2000
 Primary: 600 Volts
 Secondary: 120/240 Volts
 Frequency: 60 Hz
 Insulation Class: 180° C
 Temperature Rise: 115° C
 Weight: 50.0 Lbs

| Termination | Location | Terminals |
|-------------|----------|-----------------|
| Primary: | Front | Terminal Blocks |
| Secondary: | Back | Terminal Blocks |

Wiring Connection:

Primary:
 Voltage 600
 Connect Lines To: H1-H2



Secondary:
 Voltage 240
 Interconnect: X2 To X3
 Connect Loads To: X1-X4

120
 X1 To X3
 X2 To X4
 X1-X4

120/240
 X2 To X3
 X1-X2-X4
 (X2 is a Neutral)

Standards:

1. CSA Certified
 - File No. LR34493
2. UL Listed
 - File No. E110286

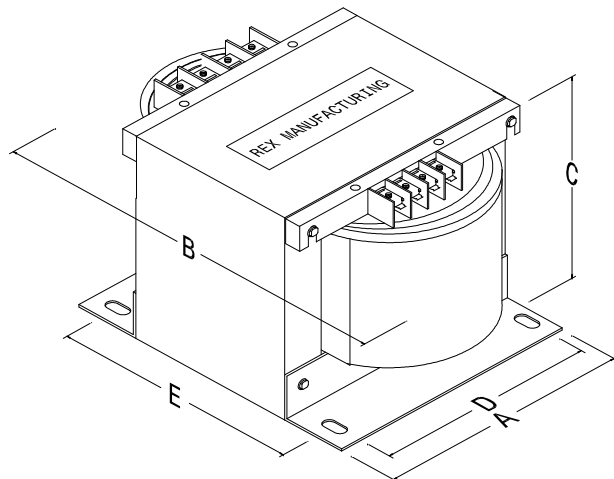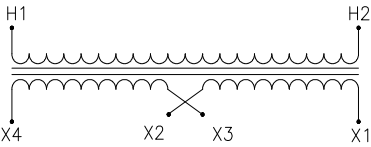

Dimensions (Inches):

- A = 7.50
- B = 6.50
- C = 6.25
- D = 6.00
- E = 3.75

(Mounting Slots: 0.31 X 0.625)

Design:

- Open Construction
- Indoor Application
- Floor/Wall Mounting

Prepared by: AP
 Approved by: VS
 Date: MAR.10, 2008