

WIRING CONNECTION:

PRIMARY:

VOLTS 6600 CONNECT LINES TO:
H1 - H2

SECONDARY:

VOLTS 120 INTERCONNECT CONNECT LINES TO:
120 X1-X3, AND X2-X4 X1-X4
240 X2-X3 X1-X4
120/240 X2-X3 X1-X3-X4
AND X2 IS A NEUTRAL

CONTROL POWER TRANSFORMER

TYPE: ANN-SELF COOLED

REX'S CAT. NO. CPT750YK

VA: 750 VA
PRIMARY: 6600 VOLT
SECONDARY: 120/240 VOLT
INSULATION CLASS: 185° C
TEMPERATURE RISE: 115° C Maximum
FREQUENCY: 60 Hz.
COILS: COPPER (CAST)
WEIGHT: 95 Lbs

TERMINATION:

-PRIMARY: SCREW TERMINALS
-SECONDARY: SCREW TERMINALS



SPECIAL FEATURES:

-PRIMARY BIL 60 KV

-HIGH POT:
PRIMARY TO SECONDARY 19000 VAC FOR 1 MIN.

STANDARDS:

-CSA APPROVED
-UL RECOGNIZED

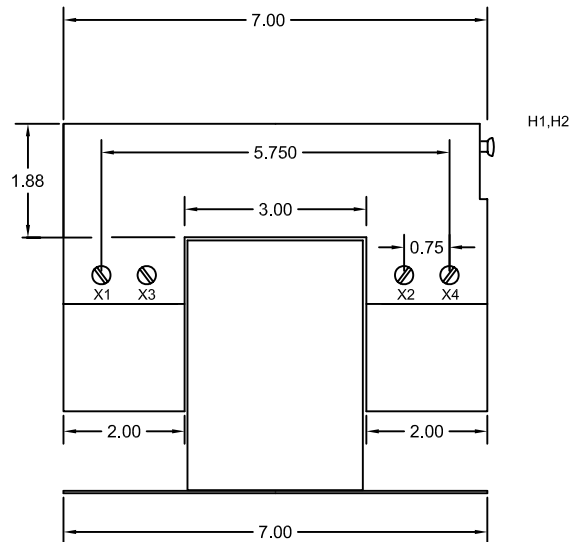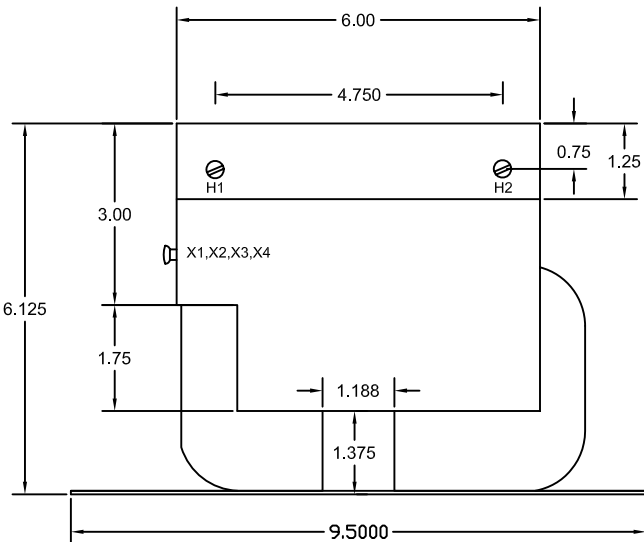

REX POWER MAGNETICS		
DIVISION OF TRANSFACTOR INDUSTRIES INC.		
SCALE: N.T.S.	DRAWN BY: SARKIS	DATE: FEBRUARY 1, 2006
JOB:	CHECKED BY: V.S	DATE: FEBRUARY 1, 2006
TITLE: 750 VA REX CONTROL POWER TRANSFORMER		
DRAWING No.: CPT750YK		

REV.	REMARKS	BY	DATE